



Assembly Instructions

Connecting Table - Trados Metal

(see opposite side for Trados wood Series)




Step 1: Place the table face down on a smooth, clean work surface. On the bottom of the table you will see 4 “L” brackets factory installed as shown in Figure 1 at left. using a phillips head screwdriver, remove all 4 “L” brackets from the table. Set the 4 bolts and washer aside until you reach Step 4.

Step 2: On the underside of the Trados chair are 2 metal cross braces which support the seat. Using the Allen wrench (provided with the table) and a 7/16” wrench, remove the top bolt and nut from the same ends of both front and rear cross braces. This top bolt attaches the metal brace to the side brace. It is the bolt on the right in the picture shown at right. Make certain that this is the side you want to attach the connecting table to the chair.



Step 3: Attach two of the “L” brackets removed in Step 1 to the Trados Metal frame using the bolts you removed in Step 2. The slotted hole of both “L” brackets should be suspended on the outside of the chair as shown at left. Repeat Step 2 and Step 3 for the other chair to which the connecting table will attach.

Step 4: Place the chairs that will be attached to the connecting table approximately 24” apart. Carefully place the connecting table top facing up on the 4 suspended “L” brackets. Using the 4 bolts and washers removed in Step 1, attach the table to the cchairs. Do not tighten the bolts until the chairs are in their final location. Be certain that the table is snug against the chair frame.

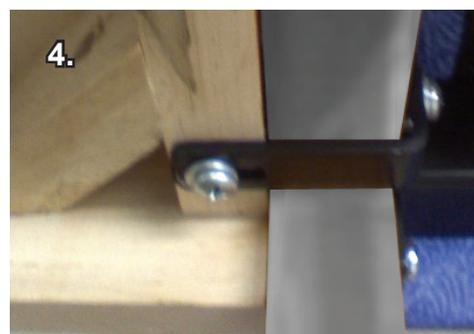

If you have any difficulty with this installation/assembly, please contact our Customer Service department at 1-800-447-3462.

Goes Great with Work.®

