

Hyperwork

Storage Cabinets


Wall Mount

HPFi




Tools Needed

- Level
- Tape Measure (at least 10')
- Phillips screwdriver (manual or power)
- Pencil
- Stud locator (when attaching to drywall surface)

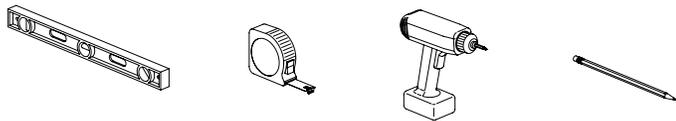

Hardware Provided

- Wall Hanger Rail

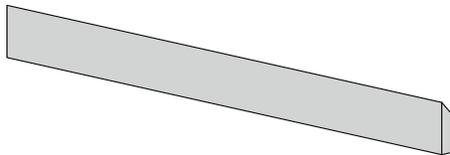

NOTE: No fasteners are included for attachment to the wall. It is the responsibility of the installer to provide the correct fasteners for the applicable (structural) wall type, e.g. block or drywall with studs. Be certain to use fasteners that will support the total weight of the cabinet (listed below) and its contents when fully loaded.

Open Storage Cabinet Weight (Empty)


30" Wide Cabinet - 48 lbs.
36" Wide Cabinet - 55 lbs.
42" Wide Cabinet - 63 lbs.
48" Wide Cabinet - 70 lbs.
54" Wide Cabinet - 77 lbs.
60" Wide Cabinet - 96 lbs.
66" Wide Cabinet - 103 lbs.
72" Wide Cabinet - 110 lbs.

Enclosed (doors) Storage Cabinet Weight (Empty)

30" Wide Cabinet - 68 lbs.
36" Wide Cabinet - 76 lbs.
42" Wide Cabinet - 85 lbs.
48" Wide Cabinet - 102 lbs.
54" Wide Cabinet - 110 lbs.
60" Wide Cabinet - 126 lbs.
66" Wide Cabinet - 135 lbs.
72" Wide Cabinet - 150 lbs.

Step 1

Position the cabinet against the wall in the desired location. Place your level on top of the cabinet. With your pencil, mark the wall where the top of the cabinet will be located. Two (2) people may be required for this step to hold the cabinet in place while the second person levels and draws the first locator line. After taking the cabinet away from the wall, use the Wall Hanger Rail, tape measure and level to draw a second line 6" below the first line.

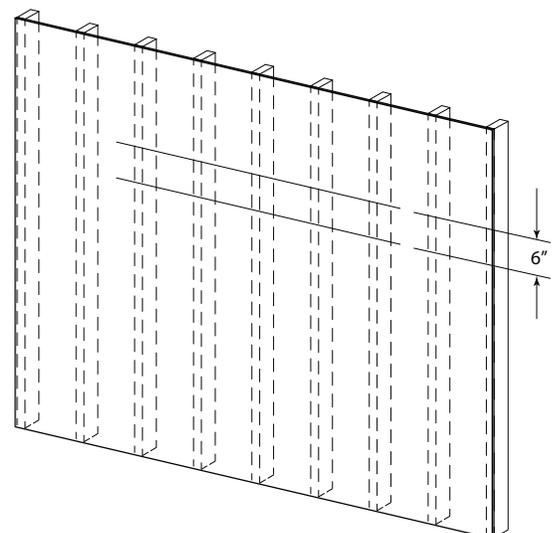

Hyperwork

Storage Cabinets



Wall Mount

HPFi



Step 2

Align the Wall Hanger Rail to the lower locator line on the wall and attach to the wall using your installer-supplied fastening devices. Note that the Wall Hanger Rail is shorter than the rail on the back of the Storage Cabinet so that it may be secured to wall studs (where applicable) and allow it to adjust side-to-side to the final desired location.

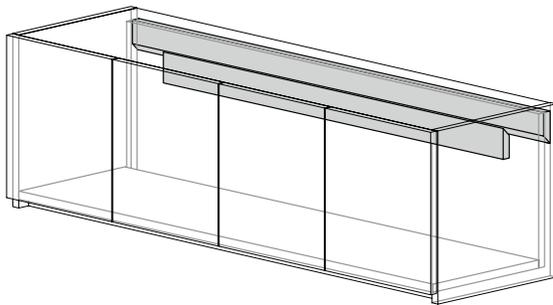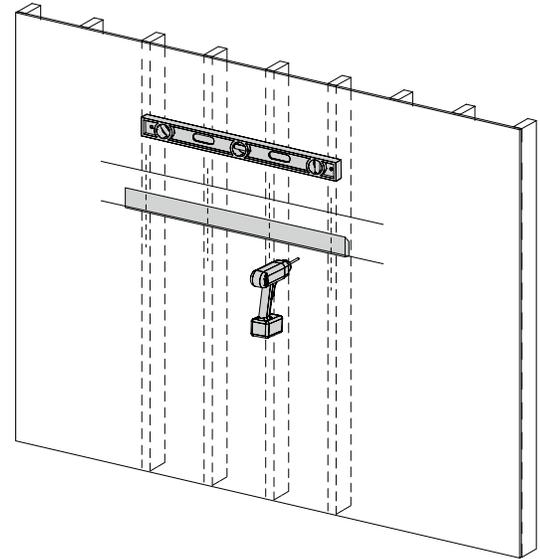

Step 3

Place the Storage Cabinet flush against the wall slightly above the mounted Wall Hanger Rail. Carefully lower the Storage Cabinet onto the Wall Hanger Rail. The opposing angles of the Wall Hanger Rail and the Storage Cabinet mounted Rail should snugly engage.